

**TRENNJAEGER®**


## Metal band saw machine TEBA 362/ 432/ 502 HA/GHA






TEBA 362/432/502 HA Best.Nr.: 550403/ 550415/ 550448

TEBA 362/432/502 GHA Best.Nr.: 550387/ 550148/ 650823

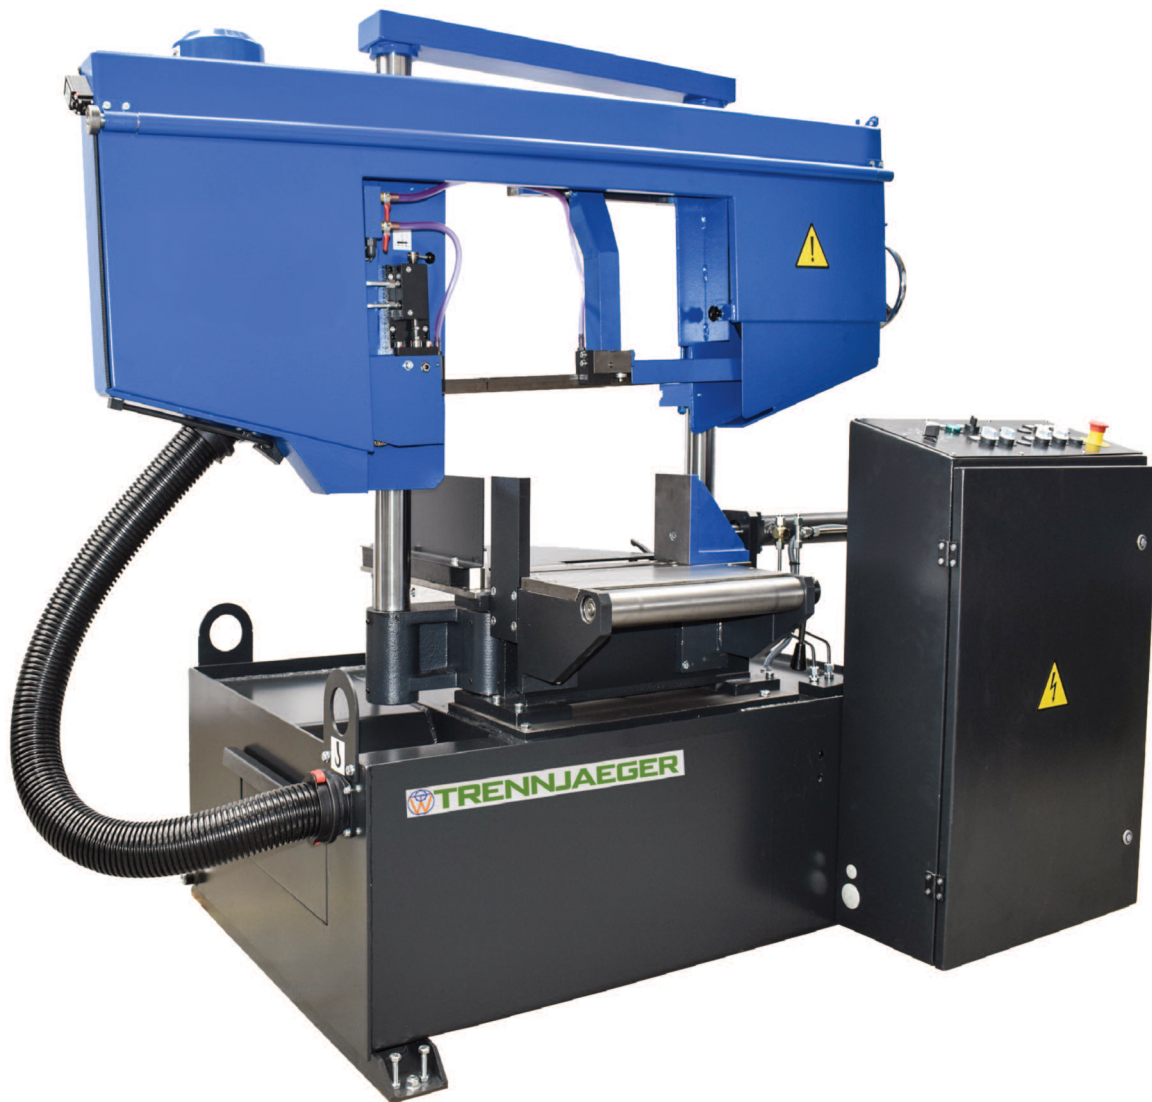Semi-automatic metal band saw machine

Catalog S. 154/155




 3660 x 27 x 0,9 mm 4400 x 34 x 1,1 mm 5620 x 41 x 3,1 mm	 16 - 73 m/min 15 - 88 m/min 10 - 90 m/min	 1,5 2,2 4,0	 750 kg 1100 kg 1550 kg	 1800 x 1140 x 1570 mm 2170 x 1300 x 1850 mm 2800 x 1260 x 2300 mm
● ■ ■ 90° ● ■ ■ 45° ● ■ ■ 30°	<b>TEBA 362 HA/GHA</b> 305/305x305/305x360 255/255x305/225x305 125/125x125/125x305	<b>TEBA 432 HA/GHA</b> 360/360x360/360x430 305/305x305/305x360 175/175x175/175x360	<b>TEBA 502 HA/GHA</b> 500/500x500/500x500 370/370x370/370x500 250/250x250/250x250	


We reserve the right to make design changes in the course of technical improvements. Illustrations, dimensions and weights are non-binding.

**TRENNJAEGER®**

## Metal band saw machine TEBA 362/ 432/ 502 HA/GHA

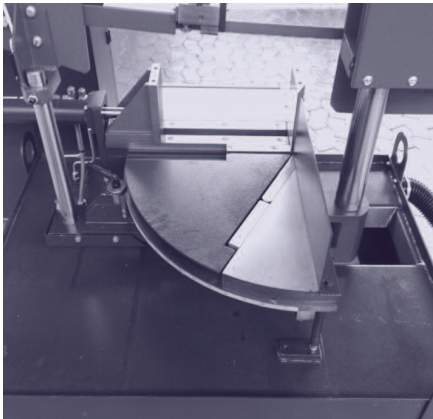

Miter steplless 90 ° to 30 ° (GHA)

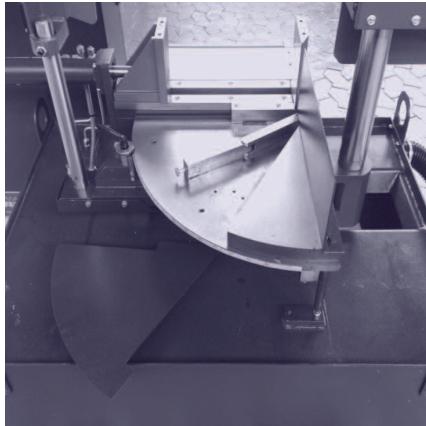

Removable plate with flexible support bolt (GHA)



Manual leveling roller on the infeed side

### Standard equipment:

- Two massive saw band guides with guide rollers and hard metal guide plates
- Complete electrical equipment 400 V. / 50 Hz.
- Complete coolant system
- Steplless cutting speeds from 10-100 m / min.
- Programmable saw functions
- Error display
- Fixed stops up to 90 degrees and 30 degrees for the GHA version
- Saw band run with 3 ° inclination angle
- (advantageous when sawing profiles)
- Chip brush
- Reinforced cutting pressure
- Infinitely adjustable saw arm feed
- Rapid return of the saw arm
- Automatic shutdown if the saw band breaks
- Cutting pressure monitoring
- Saw band tensioning with adjusting spindle and disc springs
- Mechanical length stop 1000 mm
- Material feed roller with eccentric height adjustment
- Operating tools
- Documentation
- CE standard