

Semi-automatic miter/straight cut circular saw machine

WAK-TL 350HA / 400HA / 500HA / 600HA

Best.Nr.: 550703 / 550705 / 550707 / 550061

Semi-automatic sawing machine with miter cuts on both sides for non-ferrous metals

WAK-TL 600 HA-90° / 650 HA-90° / 700 HA-90°

Best.Nr.: 550189 / 550190 / 550098

Semi-automatic sawing machine 90° cut for non-ferrous metals






Catalog P. 134/135



WAK TL 600 HA



WAK 700 HA 90°


 350/400/500/ 600 mm 600/650/700 mm	 3000 m/min	 2,0 3,0 5,0 5,0	 230 kg 380 kg 430 kg 500 kg	 980x820x1650 mm 900x1000x1480 mm 1200x1100x1500 mm 1300x1250x1650 mm	
					WAK-TL 350/400/500/600 HA
● ■ ■ 90° 125 110x110 175x175 130 110x110 250x75 180 150x150 300x125 225 210x210 430x150					
● ■ ■ 45° 105 85x85 100x80 115 100x100 160x75 150 120x120 145x120 220 210x210 190x100					

A detailed description of the saw bands, saw blades and roller conveyors can be found in the appendix to this catalogue.




semi-auto miter saw machine

- Stepless miter cut adjustment 20° - 90° - 0° or 90° version
- Safety two-hand operation via push button
- Electrically secured protective hood
- Optimally adjustable, vertically arranged pneumatic clamping cylinders to the left and right of the saw blade
- Adjustable stop rail up to approx. 70 mm for slitting materials
- Ergonomically arranged control panel
- Maintenance unit with pressure gauge and blow-out pistol
- Spray oil tank for the minimum lubrication system
- Chip drawer (option)
- Heavy-duty machine frame
- Horizontal clamping cylinder off
- WAK-TL 400 HA

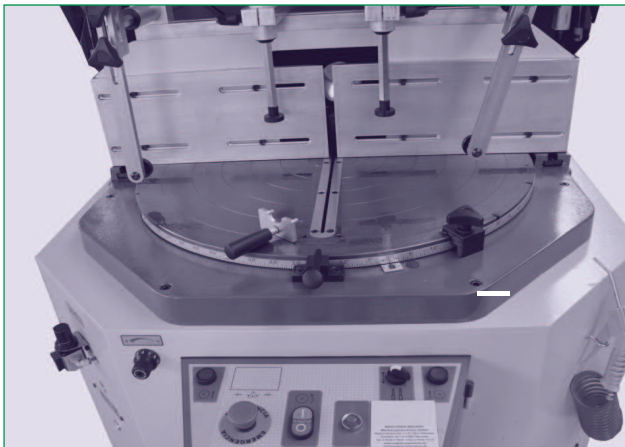

Material clamp 4-way individually movable and foldable
Semi-automatic miter - circular saw machine
for non-ferrous metals.

The semi-automatic underfloor circular sawing machines of the WAK-TL series are primarily suitable for profiles and panels or beams. The cutting material is clamped vertically on both sides and is adjustable. The two-hand operation with the machine cover closed serves to ensure occupational safety. The machine table can be steplessly adjusted up to max. 0° = 180° can be swiveled on both sides. The back stop line can be moved back up to 210mm for slashing.

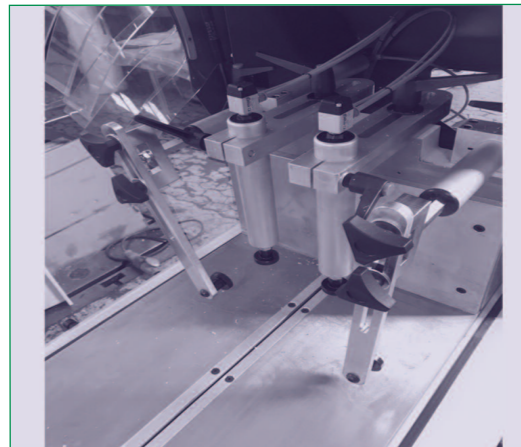

Material tensioner adjustable with clamping lever