






TRENNJAEGER® metal circular sawing machines S 315 / S 315 HA / S350 / S 350 HA

S 315 order no. : 650080 / S 315 HA order no. : 650081 / S350 order no. 650570 / S 350 HA order no. 650572
 Vertical saws for steel and non-ferrous metals. TRENNJAEGER worm gear units. Proven a thousand times.

Catalog P. 124/125



 <p>275/300/315 mm (S315/HA) 350/370 mm (S 350/HA)</p>	 <p>17/33 / 33/66 m/min S 315/HA) 15/30 / 15/70 m/min (S350/HA)</p>	 <p>1,5/1,8 1,9/2,2</p>	 <p>327/360 kg 390/410 kg</p>	 <p>900x800x1700 mm 900x800x1950 mm 800x850x1900mm 900x1020x1850 mm</p>
S 315 / S 315 HA		S 350 / S 350 HA		
● ■ ■ mm 90°	108/93x93/150x90	130/110x110/180x100		
● ■ ■ mm 45°	108/93x93/105x80	130/100x100/140x100		
● ■ ■ mm 30°	93/80x80/75x90	105/90x90/100x100		

A detailed description of the saw bands, saw blades and roller conveyors can be found in the appendix to this catalog.




TRENNJAEGER® S 315 / S 315 HA/ S 350/ S 350 HA


- 2 speed motor
- Cooling / surge lubrication system with pump
- Strongly dimensioned, powerful worm gear transmission
- Electric panel with individual functions
- Vice, stop and clamp
- Machine base with integrated chip drawer and separate chip drawer
- Holding arm for double tension
- Feed drive on S 315/350 HA with hydropneumatic cylinder, stepless
- Flat guides on both sides
- Turning and base plate with scale
- 45 ° - 90 ° - 30 °
- Lever for swiveling the machine
- 45 ° stop can be removed



Horizontal clamping system on both sides of the saw blade

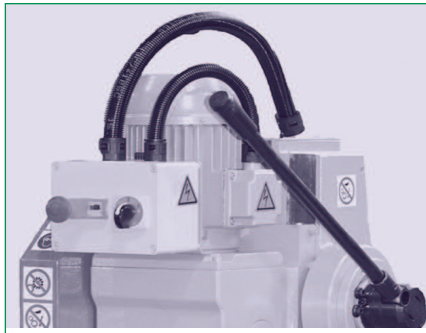

Manual version with handle

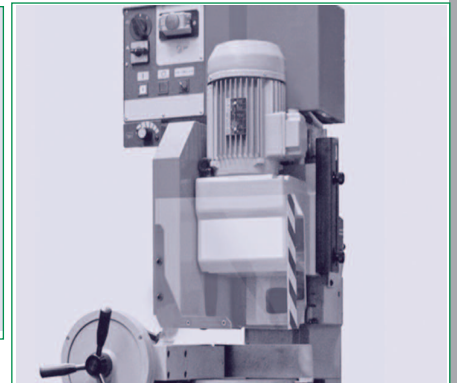

Semi-automatic version with hydropneumatic feed